

#### Description:


Amplical's SW1A002 SPST broadband coaxial absorptive PIN diode switch features low insertion loss, low vswr, high isolation and fast switching speed. An internal 50Ω termination is provided on the J2 port when switched in the isolation (off) state. RF ports incorporate DC blocks. An on-board TTL-compatible driver provides convenient logic control. The switch operates from +5V DC and a negative DC supply ranging from -12V to -20V. The compact design incorporates SMA female connectors. Two ø0.096 through holes are provided for convenient chassis mounting.

#### Specifications:

Parameter	Specification
Frequency Range	500 MHz to 18 GHz minimum
Insertion Loss	2.6 dB maximum
VSWR (J1 and J2 on; J2 off)	2.0:1 maximum (50Ω)
Isolation (port-to-port and input-to-output)	68 dB minimum (above insertion loss)
Switching Speed: T <sub>ON</sub> (50%TTL to 90%RF)	75 nsec maximum
Switching Speed: T <sub>OFF</sub> (50%TTL to 10%RF)	45 nsec maximum
Switching Speed: T <sub>RISE</sub> (10%RF to 90%RF)	25 nsec maximum
Switching Speed: T <sub>FALL</sub> (90%RF to 10%RF)	15 nsec maximum
RF Power, Operating	+27 dBm maximum
OIP3	+45 dBm minimum
OIP2	+75 dBm minimum
Control Logic (EI)	TTL 0: Insertion Loss; TTL 1: Isolation
DC Supplies	+5.0 ± 0.3V @ 40mA maximum -12.0 to -20.0V @ 40mA maximum
RF Connectors	SMA Female per MIL-PRF-39012
DC and Logic Control Ports	ø0.030" x 0.20" long solder pin
Operating Temperature	-55°C to +85°C
Storage Temperature	-65°C to +125°C
Enclosure Finish	Albaloy
Lead Finish	Gold Plate per MIL-G-45204
Weight	25 grams maximum
Mechanical	See Figure 1

#### Applications:


- Communications Systems
- Electronic Simulators
- Bypass/Selector Switch
- Test Equipment
- Radar Systems
- EW Systems
- Modulator

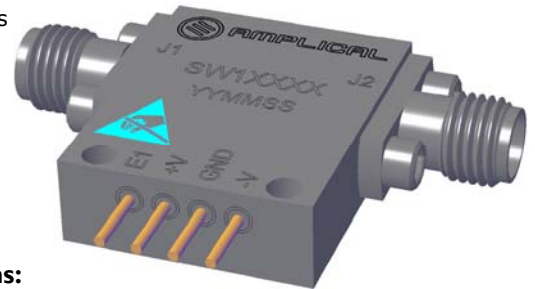

#### Custom Options:

- Hermetic Seal
- Alternate DC operating voltage supplies
- MIL / Hi-Rel Screening
- Band-specific performance optimization
- Unit-to-unit phase and amplitude matching
- Reverse control logic

**Figure 1 Mechanical Outline:**

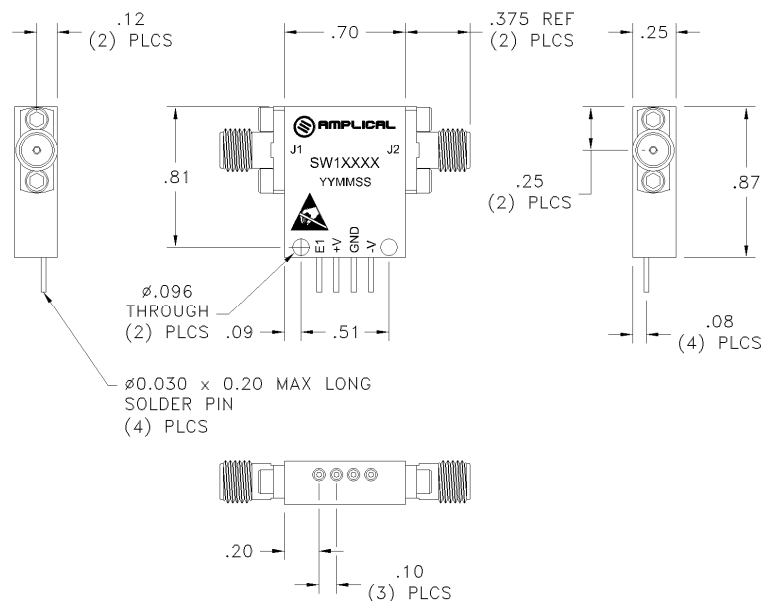

#### Outline drawing notes:

1. Drawing not to scale
2. Dimensions in inches
3. Tolerance: x.xx = ±0.020, x.xxx = ±0.010

#### Customization:

Amplical offers complete customization of any electrical or mechanical parameter for any product. All models are available with hermetic seal and complete MIL screening. Contact the factory to discuss your specific requirements

#### About Amplical Corporation:

Amplical is a leading supplier of high quality RF and Microwave components. Utilizing state of the art design and manufacturing techniques, Amplical focuses on producing high performance amplifiers, switches, modulators, attenuators, phase shifters and limiters at affordable prices. Amplical serves the defense, aerospace, communications, test and instrumentation markets.

#### Disclaimer:

Specifications subject to change without notice. Contact the factory prior to placing an order to assure you have the most up to date product specification.